
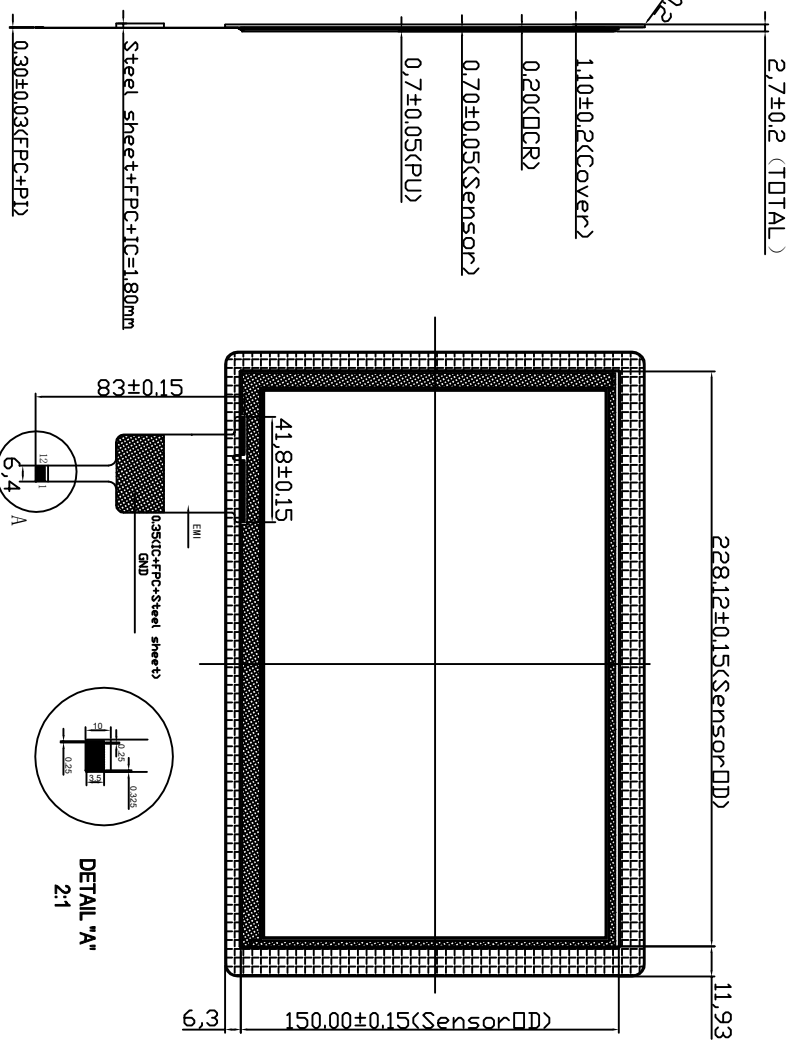


No ROHS hazardous material

Ordinal	Modify content description	Cartographer	Date of change
Δ			
Δ			

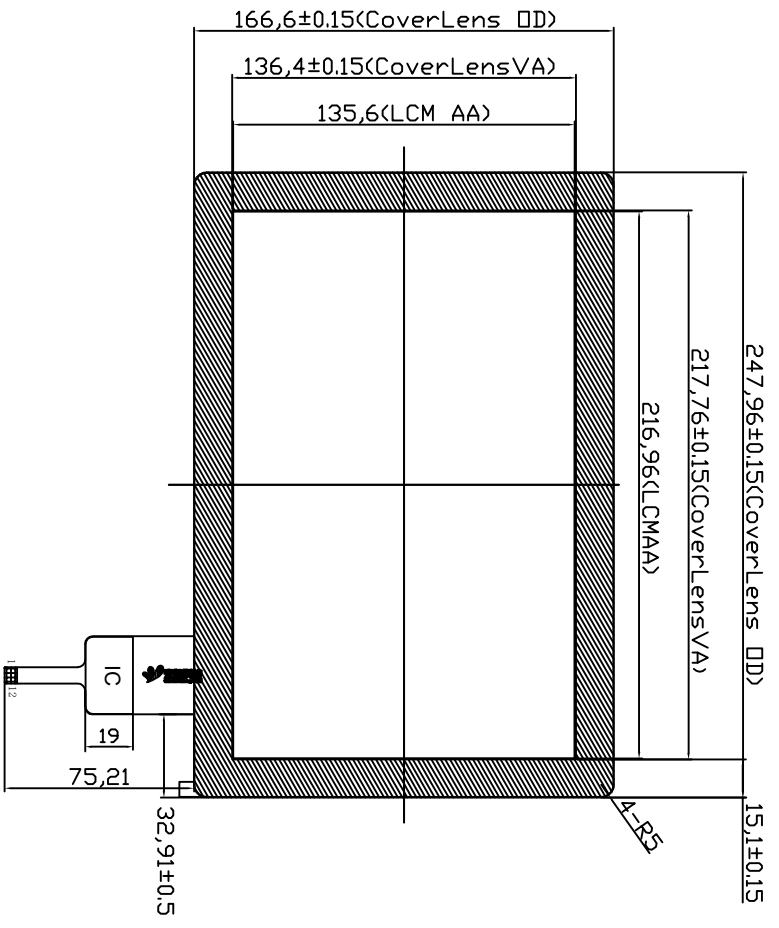

Screen printing area: Print Black

Front view

Side view

Back view

Double-sided Frame adhesive = 0.175mm (3M9495)

Frame adhesive foam area = 0.7mm

Technical parameters

	TP	PIN:
1. Interfaces: 12C	1	GND
2. Structure : G+G	2	NC
3. IC solutions: CTTMA568	3	NC
4. Impact resistance /135g/Height=35mm/1time	4	NC
5. Touch points: 10 points	5	swdio
6. Power supply: 3.3V	6	GND
7. Humidity range: 45~85%RH		
8. Transmittance: ≥85%	7	SDA
9. Surface hardness: ≥6H	8	SCL
10. Operate : -20°C~+70°C, ≤85%RH	9	RST
11. Storage : -30°C~+80°C, ≤85%RH	10	INT
12. Brightness: 450cd/m2	11	VDD
13. Viewing angle: 80/80/80/80	12	VDD
14. Unmarked dimension tolerance as±0.2		



杭州宏巢科技有限公司  
GraHowlet Technology CO., Ltd

Model	Version	Designer	LUO	Date	2017-3-16	Unit	MM
HX1011701	V2.0	Approved	HBZ	Date	2017-3-16	Proportion	1:1